


ARGO HD

GRUPPO DI COMANDO MANUALE A 2 VIE CON VALVOLA DI MAX PRESSIONE
TWO - WAY MANUAL CONTROL UNIT WITH MAX PRESSURE REGULATOR
UNITÉ DE COMMANDE MANUELLE À DEUX VOIES AVEC LIMITEUR DE PRESSION
GRUPO DE MANDO MANUAL DE 2 VÍAS CON VÁLVULA DE MÁXIMA PRESIÓN
MANUELLE 2-WEGE-STEUEREINHEIT MIT ÜBERDRUCKVENTIL



FOR MORE INFO

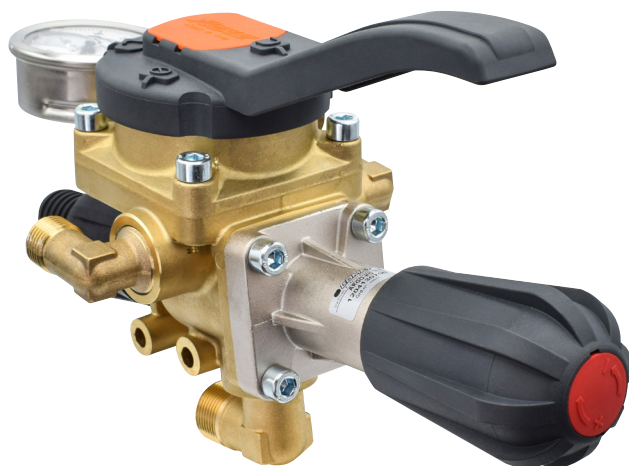

Portata: 180 l / 1'. Pressione massima: 50 bar. Parti a contatto: ottone. Tutti i modelli sono disponibili con: manometro lineare 0 - 60 bar, senza manometro, manometro isometrico disponibile a richiesta.



Flow - rate: 180 l / 1'. Maximum pressure: 50 bar. Wetparts: full brass. All models are available with: stainless steel linear pressure gauge 0 - 60 bar, without pressure gauge, isometric pressure gauge on request.

Débit : 180 l / 1'. Pression maximum: 50 bar. Parties humides: laiton intégral. Tous les modèles sont disponibles avec: manomètre linéaire en acier inoxydable 0 - 60 bar, sans manomètre, manomètre isométrique sur demande.

Caudal: 180 l / 1'. Presión máxima: 50 bar. Partes de contacto: totalmente de latón. Todos los modelos están disponibles con: manómetro lineal 0 - 60 bar, sin manómetro, manómetro isométrico disponible bajo pedido.

Fördermenge: 180 l / 1'. Maximaler Druck: 50 bar. Kontaktteile: Ganz aus Messing. Alle Modelle sind wie folgt erhältlich: mit linearem Manometer 0 - 60 bar, ohne Manometer, Isometrisches Manometer auf Anfrage erhältlich.

Ingresso
Inlet
↑ G 3/4 M
Mandata
Delivery
↑ G 1/2 M
Rifiuto
By-pass
↑ Ø 25

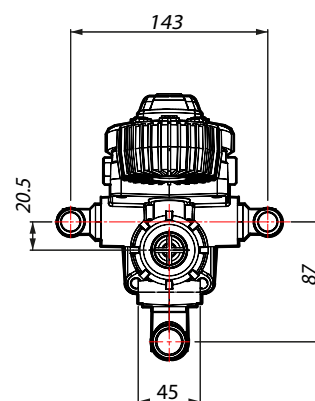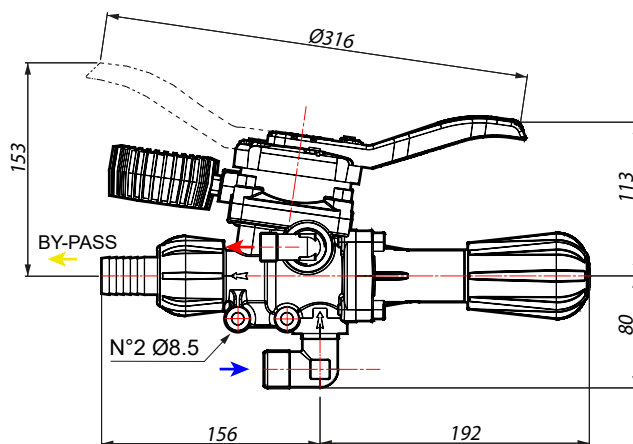

ARGO HD

Tipo Type	Pompe Pumps	Su pompa On pump	A distanza Remote	MAX		MAX		Rubinetti Taps		
				bar	p.s.i.	l/min	U.S.g.p.m.		kg	lb
	-	-	✓	30	435	180	47,6	2-4	2,9	6,4
	APS 51 - 61 YB 75 - 150	-	✓	40	580	180	47,6	2-4	2,9	6,4
	APS 71 - 96 - 101 121 - 145 - 141 - 166 IDS 960 - 1000 - 1300 1400 - 1201 - 1401 1501 - 1701 - 2001 YA 65 - 75 - 130 - 150	-	✓	50	725	180	47,6	2-4		